



Installation

Recessed mounting in stairs (universal mounting box not included).

Optical part

Polycarbonate OPAL diffuser

Design

Polycarbonate body & diffuser, manufactured in conformity with Norms EN60598-2-22 & UNE 20-392-93.

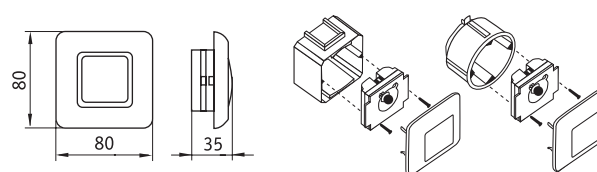


Fig. 1/Dib. 1



Model	Weight	Autonomy	Colour Frame	Colour LED	Battery	Lamp	Code
BS – 1TR	0.1	1	Titanium	Red	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006510
BS – 1WR	0.1	1	White	Red	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006530
BS – 1NR	0.1	1	Nickel	Red	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006550
BS – 1GRR	0.1	1	Graphite	Red	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006570
BS – 1GR	0.1	1	Gold	Red	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006590
BS – 1TA	0.1	1	Titanium	Amber	2x1.2 V; 0.4A*h	0,75 W (E10)	4501000020
BS – 1WA	0.1	1	White	Amber	2x1.2 V; 0.4A*h	0,75 W (E10)	4501000030
BS – 1NA	0.1	1	Nickel	Amber	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006650
BS – 1GRA	0.1	1	Graphite	Amber	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006670
BS – 1GA	0.1	1	Gold	Amber	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006690
BS – 1TB	0.1	1	Titanium	Blue	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006710
BS – 1WB	0.1	1	White	Blue	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006730
BS – 1NB	0.1	1	Nickel	Blue	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006750
BS – 1GRB	0.1	1	Graphite	Blue	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006770
BS – 1GB	0.1	1	Gold	Blue	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006790
BS – 1TG	0.1	1	Titanium	Green	2x1.2 V; 0.4A*h	0,75 W (E10)	1711500000
BS – 1WG	0.1	1	White	Green	2x1.2 V; 0.4A*h	0,75 W (E10)	1710500000
BS – 1NG	0.1	1	Nickel	Green	2x1.2 V; 0.4A*h	0,75 W (E10)	1715500000
BS – 1GRG	0.1	1	Graphite	Green	2x1.2 V; 0.4A*h	0,75 W (E10)	1714500000
BS – 1GG	0.1	1	Gold	Green	2x1.2 V; 0.4A*h	0,75 W (E10)	1713500000
BS – 1TW	0.1	1	Titanium	White	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006610
BS – 1WW	0.1	1	White	White	2x1.2 V; 0.4A*h	0,75 W (E10)	4501006630
BS – 1NW	0.1	1	Nickel	White	2x1.2 V; 0.4A*h	0,75 W (E10)	4501007260
BS – 1GRW	0.1	1	Graphite	White	2x1.2 V; 0.4A*h	0,75 W (E10)	4501007270
BS – 1GW	0.1	1	Gold	White	2x1.2 V; 0.4A*h	0,75 W (E10)	4501007280