

Serie BLP

Emergency lighting



BLP – 102WW



BLP – 102GRW



BLP – 102SW



Installation



Recessed mounting in stairs (mounting box included).

Design ANTIVANDALIC


polycarbonate base and die cast aluminum frame, manufactured in conformity with Norms EN60598-2-22 & UNE 20-392-93.

Optical part

Polacarbonate OPAL diffuser

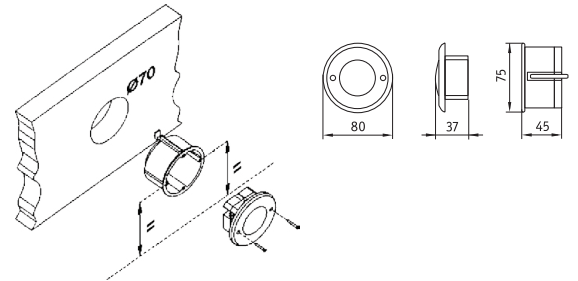

Installation in marble or prefabricated wall installation in plastered wall.



Recess the installation box inside the wall and introduce the rubber washer between the box and body of the spot light.



Model	Weight	Autonomy	Colour Frame	Colour LED	Battery	Lamp	Code
BLP – 102WW	0.1	3	White	White	1.2 V; 0.4A*h	White LED	4501006900
BLP – 102GRW	0.1	3	Graphite	White	1.2 V; 0.4A*h	White LED	4501006910
BLP – 102SW	0.1	3	Silver	White	1.2 V; 0.4A*h	White LED	4501006920