



VEGA EFS-380



VEGA PC-180

Installation

Ceiling, Surface or recessed mounting.
(For recess mounting use accessories ST-21)

Optical part



Polycarbonate transparent diffuser.
Pictograms (see page 41)

Design

Poly carbonate housing and diffuser, manufactured in conformity with Norms EN60598-2-22 & UNE 20-392-93. LAMP included.



ACCESORIES

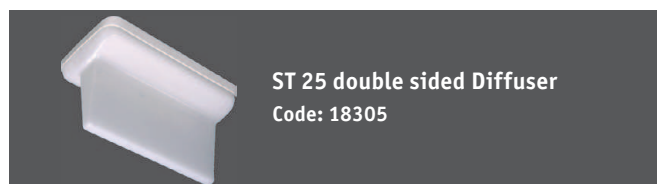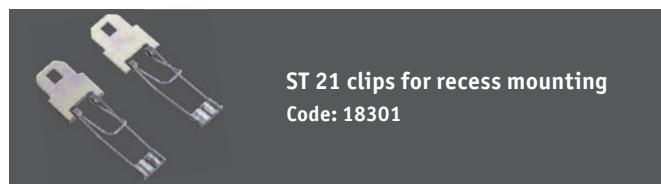

Model	Type	IP	Weight	Autonomy	Lumens	Battery	Lamp	Code
VEGA EFS-70	NM	22	0.7	1	106	2.4 V 1.5A*h	6 W(G5)	4501001080
VEGA EFS-180	NM	22	0.8	1	125	3.6 V 1.5A*h	6 W(G5)	4501006230
VEGA EFS-380	NM	22	0.9	1	293	6.0 V 1.5A*h	PL-11 W(2G7)	4501001050
VEGA EFS-73	NM	22	0.8	3	101	(2.4 V 1.6A*h)x2	6 W(G5)	4501001090
VEGA EFS-250	NM	22	0.8	1	180	4.8 V 1.5A*h	6 W(G5)	4501001040
VEGA EFS-55	NM	22	0.7	1	65	2.4 V 1.5A*h	6 W(G5)	4501006240
VEGA VM-200	M	22	0.8	1	150	3.6 V 1.5A*h	6 W(G5)	4501007070
VEGA VM-203	M	22	0.8	3	80	(2.4 V 1.6A*h)x2	6 W(G5)	4501007080
VEGA VM-210	M	22	0.8	1	160	3.6 V 1.5A*h	PL-11 W(2G7)	4501007200
VEGA PC-180	C	22	0.8	1	140	3.6 V 1.5A*h	6 W(G5)	4501002010
VEGA PC-73	C	22	0.8	3	60	(2.4 V 1.6A*h)x2	6 W(G5)	4501002040
VEGA SIGN	AC/DC	22	0.5	-	280	-	6 W(G5)	4501007210

*NM: NON MAINTAINED / M: MAINTAINED /*C: COMBINED 2 TUBES