

# Serie MIZAR

Emergency lighting



**MIZAR S, SP LED**  
**MIZAR SIGN S, SP LED**



**MIZAR SI LED**  
**MIZAR SIGN SI LED**



## Installation


Wall surface mounting (lateral or frontal),  
Ceiling mounting (surface or suspended  
via chains), Ceiling recess mounting (use  
accessory ST-36)

## Design


Poly carbonate housing, manufactured in  
conformity with Norms EN60598-2-22 &  
UNE 20-392-93.  
LED type: SMD

## Optical part

8 mm PMM diffuser.  
Pictograms see table below

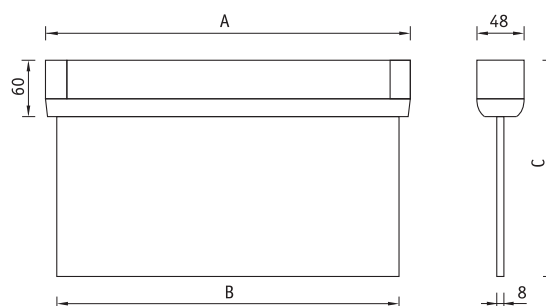

	A	B	C
<b>MIZAR S LED</b>	366	342	233
<b>MIZAR SP LED</b>	271	248	194
<b>MIZAR SI LED</b>	271	248	270
<b>MIZAR SIGN S LED</b>	366	342	233
<b>MIZAR SIGN SP LED</b>	271	248	194
<b>MIZAR SIGN SI LED</b>	271	248	270



Model	Type	IP	Weight	Autonomy	Distance	Battery	Lamp	Power	Code
<b>MIZAR S LED</b>	M	40	1.6	3	33 mts	6.0 V 0.8A*h	12 LED	4,1	<b>4502001110</b>
<b>MIZAR SP LED</b>	M	40	1.2	3	25 mts	6.0 V 0.8A*h	9 LED	3,2	<b>4502001210</b>
<b>MIZAR SI LED</b>	M	40	1.4	3	40 mts	6.0 V 0.8A*h	9 LED	3,1	<b>4502001310</b>
<b>MIZAR SP LED AT</b>	M	40	1.2	3	25 mts	6.0 V 0.8A*h	9 LED	3,2	<b>4502002420</b>
<b>MIZAR SIGN S LED</b>	M	40	1.5	-	33 mts	-	12 LED	4,1	<b>4502002110</b>
<b>MIZAR SIGN SP LED</b>	M	40	1.1	-	25 mts	-	9 LED	3,2	<b>4502002210</b>
<b>MIZAR SIGN SI LED</b>	M	40	1.3	-	40 mts	-	9 LED	3,1	<b>4502002310</b>

\*M: MAINTAINED / \*AT: AUTO TEST