



MIRA EFS-130

Installation


Ceiling, Surface or recessed mounting.
(For recess mounting use accessories ST-21 & ST-23, see accessories)

Optical part


Polycarbonate transparent diffuser.
Pictograms (see page 41)

Design

Poly carbonate housing and diffuser, manufactured in conformity with Norms EN60598-2-22 & UNE 20-392-93. button incorporated. Lamp included.



ACCESORIES

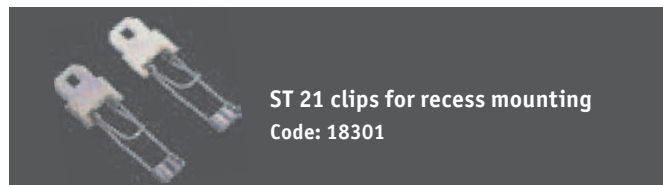

Model	Type	IP	Weight	Autonomy	Lumens	Battery	Lamp	Code
MIRA EFS-45	NM	22	0.6	1	45	2.4 V 1.5A*h	4 W(G5)	4501001070
MIRA EFS-60	NM	22	0.6	1	57	2.4 V 1.5A*h	4 W(G5)	4501006200
MIRA EFS-80	NM	22	0.6	1	87	3.6 V 1.5A*h	4 W(G5)	4501006210
MIRA EFS-130	NM	22	0.6	1	117	2.4 V 1.5A*h	PL-7 W(2G7)	4501001010
MIRA EFS-170	NM	22	0.6	1	174	3.6 V 1.5A*h	PL-7 W(2G7)	4501006220

*NM: NON MAINTAINED