

Serie BOX LED

**Installation**

Wall surface.

Design

White metal body with acrylic diffuser.

Optical part

Acrylic opal diffuser.

Pictogram included.

Serie BOX LED

IP20



Emergency lighting



TECHNICAL CHARACTERISTICS

- Supply 230V~ 50/60Hz.
- Maintained.
- Green Led indicating the Battery re-charging.
- Illumination via high luminosity white led.
- Stabilized current of Led (constant current control).
- Visibility 33 m (as per norm UNE-EN 1838).
- Verification TEST en Emergency mode via TELEMANDO (ref: TM).
- Protection Grade IP20.
- Connection via $\varnothing 6$ mm cable.
- Anchor with screws at 3 points.
- Overload & end of battery discharge protection.
- Class I Luminary.
- White Metallic body.
- Easy to change the pictogram.

CONNECTION SCHEME

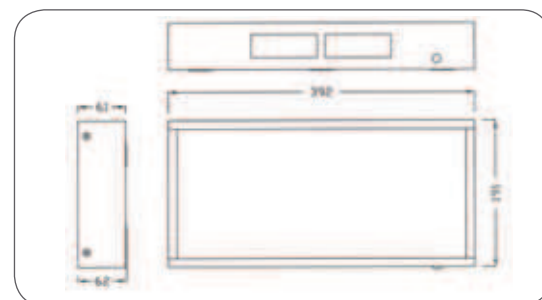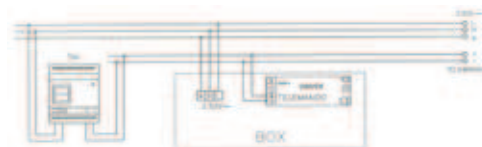

APPLIED NORMS

- CE as per directives 2006/95/CE and 2004/108/CE.
- UNE-EN 60598-2-22.
- UNE-EN 60598-1.
- UNE-EN 1838.

LED

MAINTAINED

IP20

Model	IP	Weight	Autonomy	Distance	Battery	Lamp	Code
BOX LED-1	20	1.61	1	33m	6.0V 0.8Ah	PCB30LED	30501
BOX LED-3	20	1.68	3	33m	6.0V (0.8Ahx2)	PCB30LED	30502