



SIRAH AUTOTEST

Installation

Wall or ceiling surface. Partial recessed by accessory clips ST-21. Total ceiling recessed by accessories clips ST-21 and frame ST-28. Wall recessed by flush-mounted box ST-32 and frame ST-28. Double sided diffuser ST-29 for signaling with pictograms. Is advisable to use ST-29 with frame ST-28. Accesories available only for IP42 model.

Design

Polycarbonate housing and siffuser. Self contained. Maintained or non maintained. AUTOTEST function. Two-colour LED indicator of the state of the emergency and the result of the test.

Optical part

Opal diffuser.

SIRAH AT

IP42/IP65

Emergency lighting





TECHNICAL CHARACTERISTICS

- Supply: 230V~ 50/60Hz.
- Operating mode: Maintained/Non maintained.
- Autotest: automatic verification test.
- Colour temperature: 6.000K - 7.000K.
- White PCB 39 LED 2835 - working life > 50.000 hours.
- Two-colour LED bicolor indicates state of emergency and autotest result.
- Grade: IP42 - IK04 / IP65 - IK07.
- Battery: Li-ion.
- Charge time: 24 hours.
- Class II luminary.

APPLIED STANDARDS

- CE marked.
- Manufactured according to standard UNE-EN 60598-2-22.

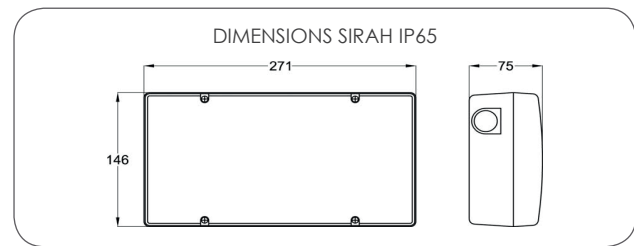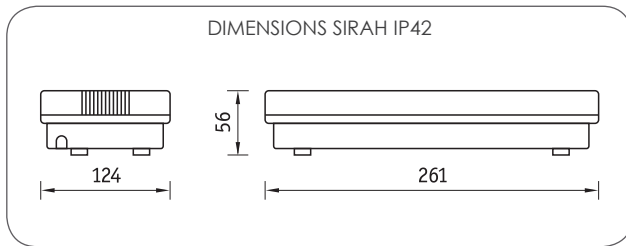

www.trqsl.com

MAINTAINED/NON MAINTAINED/AUTOTEST

IP42

Code	Model	IP	Weight	Autonomy	Lumens*	Battery	Lamp	PVP
228401	PH-75 AT ECO LED	42	0.57	1	75	3.7V 2.2Ah	PCB 39 LED 2835	
228402	PH-100 AT ECO LED	42	0.57	1	100	3.7V 2.2Ah	PCB 39 LED 2835	
228403	PH-150 AT ECO LED	42	0.57	1	150	3.7V 2.2Ah	PCB 39 LED 2835	
228404	PH-200 AT ECO LED	42	0.66	1	230	3.7V 2.2Ah	PCB 39 LED 2835	
228409	PH-300 AT ECO LED	42	0.66	1	300	3.7V 2.2Ah	PCB 39 LED 2835	
228410	PH-102 AT ECO LED	42	0.57	2	100	3.7V 2.2Ah	PCB 39 LED 2835	
228411	PH-152 AT ECO LED	42	0.57	2	150	3.7V 2.2Ah	PCB 39 LED 2835	
228412	PH-202 AT ECO LED	42	0.57	2	230	3.7V 2.2Ah	PCB 39 LED 2835	
228413	PH-302 AT ECO LED	42	0.66	2	300	3.7V 2.2Ah	PCB 39 LED 2835	
228406	PH-103 AT ECO LED	42	0.57	3	100	3.7V 2.2Ah	PCB 39 LED 2835	
228407	PH-153 AT ECO LED	42	0.66	3	150	3.7V 2.2Ah	PCB 39 LED 2835	

MAINTAINED/NON MAINTAINED/AUTOTEST

IP65

Code	Model	IP	Weight	Autonomy	Lumens*	Battery	Lamp	PVP
228421	EPH-75 AT ECO LED	65	0.82	1	75	3.7V 2.2Ah	PCB 39 LED 2835	
228422	EPH-100 AT ECO LED	65	0.82	1	100	3.7V 2.2Ah	PCB 39 LED 2835	
228423	EPH-150 AT ECO LED	65	0.82	1	150	3.7V 2.2Ah	PCB 39 LED 2835	
228424	EPH-200 AT ECO LED	65	0.87	1	230	3.7V 2.2Ah	PCB 39 LED 2835	
228429	EPH-300 AT ECO LED	65	0.87	1	300	3.7V 2.2Ah	PCB 39 LED 2835	
228430	EPH-102 AT ECO LED	65	0.82	2	100	3.7V 2.2Ah	PCB 39 LED 2835	
228431	EPH-152 AT ECO LED	65	0.87	2	150	3.7V 2.2Ah	PCB 39 LED 2835	
228432	EPH-202 AT ECO LED	65	0.87	2	230	3.7V 2.2Ah	PCB 39 LED 2835	
228433	EPH-302 AT ECO LED	65	0.87	2	300	3.7V 2.2Ah	PCB 39 LED 2835	
228426	EPH-103 AT ECO LED	65	0.82	3	100	3.7V 2.2Ah	PCB 39 LED 2835	
228427	EPH-153 AT ECO LED	65	0.87	3	150	3.7V 2.2Ah	PCB 39 LED 2835	


*Approximate lumens.

Accessories SIRAH


Emergency lighting




Code	Description	PVP
18301	ST-21 CLIPS FOR RECESS MOUNTING	3,55 €



Code	Description	PVP
18318	ST-28 WHITE FRAME SIRAH	4,00 €
18319	ST-28 GRAPHITE FRAME SIRAH	4,00 €
18320	ST-28 GREY FRAME SIRAH	4,00 €



Code	Description	PVP
18321	ST-29 DOUBLE SIDED SH-10 UP EXIT	14,00 €
18322	ST-29 DOUBLE SIDED SH-7 DOWN EXIT	14,00 €
18323	ST-29 DOUBLE SIDED SH-8/9 RIGHT/LEFT EXIT	14,00 €




Code	Description	PVP
18332	ST-32 WALL FLUSH MOUNTING BOX	3,64 €

*It is necessary accessory ST-28 for a good finish.



Code	Description	PVP
18411	ADHESIVE PICTOGRAM DOWN EXIT	1,18 €
18412	ADHESIVE PICTOGRAM UP EXIT	1,18 €
18426	ADHESIVE PICTOGRAM RIGHT EXIT	1,18 €
18429	ADHESIVE PICTOGRAM LEFT EXIT	1,18 €



Code	Description	PVP
18574	ST-41 WHITE SUPPLEMENT TO RECESSED SIRAH	22,11 €

*It is served with accessories ST-21 and ST-28.