

Gerader Adapter

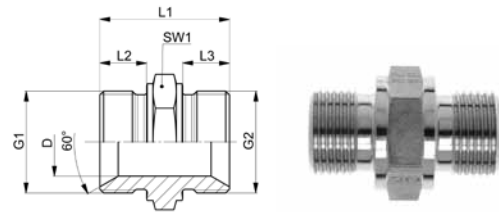
mit 60° Konus und Abdichtung Form B nach DIN 3852-2

Straight adaptors

with 60° taper and sealing form B acc. DIN 3852-2

Adaptador recto

con cono de 60° y junta forma B según DIN 3852-2

**EA**

Type-G1 /G2	Mat.-Nr.	D	G1	G2	L1	L2	L3	SW1	g/Stk
G1=Rohrgewinde (zylindrisch)			G1=BSP thread (straight)						
G2=Rohrgewinde (zylindrisch)			G2=BSP thread (straight)						
									G1=Rosca de conexión (cilíndrica)
									G2=Rosca de conexión (cilíndrica)
EA-G1.8/G1.8	736.6052.090	4.0	1/8	1/8	23.0	8.0	8.0	14	14
EA-G1.4/G1.4	736.6052.091	6.0	1/4	1/4	29.0	10.0	10.0	19	32
EA-G3.8/G3.8	736.6052.092	8.0	3/8	3/8	35.0	12.0	12.0	22	56
EA-G1.2/G1.2	736.6052.093	10.0	1/2	1/2	41.0	14.0	14.0	27	100
EA-G5.8/G5.8	736.6052.094	12.0	5/8	5/8	43.5	16.0	16.0	30	115
EA-G3.4/G3.4	736.6052.095	15.0	3/4	3/4	46.0	16.0	16.0	32	151
EA-G1.1/G1.1	736.6052.096	19.0	1	1	52.0	18.0	18.0	41	269
EA-G5.4/G5.4	736.6052.097	30.0	1 1/4	1 1/4	58.0	20.0	20.0	50	410
EA-G3.2/G3.2	736.6052.098	32.0	1 1/2	1 1/2	61.0	22.0	22.0	55	511
EA-G4.2/G4.2	736.6052.099	39.0	2	2	61.0	22.0	22.0	70	817

Gerader Reduzieradapter

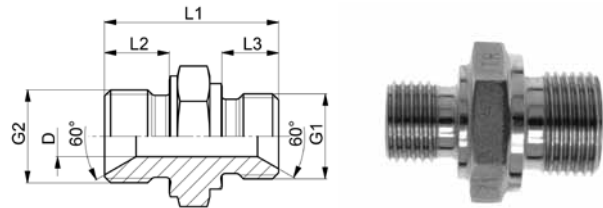
mit 60° Konus und Abdichtung Form B nach DIN 3852-2

Straight reducing adaptors

with 60° taper and sealing form B acc. DIN 3852-2

Adaptador de reducción recto

con cono de 60° y junta forma B según DIN 3852-2

**EAR**

Type-G1 /G2	Mat.-Nr.	D	G1	G2	L1	L2	L3	SW1	g/Stk
G1=Rohrgewinde (zylindrisch)			G1=BSP thread (straight)					G1=Rosca de conexión (cilíndrica)	
G2=Rohrgewinde (zylindrisch)			G2=BSP thread (straight)					G2=Rosca de conexión (cilíndrica)	
EAR-G1.4/G1.8	736.6053.600	4.0	1/4	1/8	28.0	8.0	12.0	19	33
EAR-G3.8/G1.8	736.6053.601	4.0	3/8	1/8	32.0	8.0	12.0	22	47
EAR-G3.8/G1.4	736.6053.602	6.0	3/8	1/4	35.0	12.0	12.0	22	53
EAR-G1.2/G1.4	736.6053.603	6.0	1/2	1/4	39.0	12.0	14.0	27	98
EAR-G1.2/G3.8	736.6053.604	8.0	1/2	3/8	39.5	14.0	12.0	27	93
EAR-G5.8/G3.8	736.6053.605	8.0	5/8	3/8	40.5	16.0	12.0	30	110
EAR-G5.8/G1.2	736.6053.606	10.0	5/8	1/2	43.0	16.0	14.0	30	120
EAR-G3.4/G3.8	736.6053.607	8.0	3/4	3/8	42.5	16.0	12.0	32	142
EAR-G3.4/G1.2	736.6053.608	10.0	3/4	1/2	45.0	16.0	14.0	32	153
EAR-G3.4/G5.8	736.6053.609	12.0	3/4	5/8	46.0	16.0	16.0	32	152
EAR-G1.1/G3.8	736.6053.610	8.0	1	3/8	45.5	12.0	18.0	41	236
EAR-G1.1/G1.2	736.6053.611	10.0	1	1/2	48.0	14.0	18.0	41	247
EAR-G1.1/G3.4	736.6053.612	15.0	1	3/4	54.0	16.0	18.0	41	252
EAR-G5.4/G3.4	736.6053.613	15.0	1 1/4	3/4	54.0	16.0	20.0	50	404
EAR-G5.4/G1.1	736.6053.614	20.0	1 1/4	1	56.0	18.0	20.0	50	414
EAR-G3.2/G1.1	736.6053.615	20.0	1 1/2	1	61.0	18.0	22.0	55	578
EAR-G3.2/G5.4	736.6053.616	22.0	1 1/2	1 1/4	63.0	20.0	22.0	55	633
EAR-G4.2/G5.4	736.6053.617	22.0	2	1 1/4	65.5	20.0	24.0	70	976
EAR-G4.2/G3.2	736.6053.618	32.0	2	1 1/2	67.5	22.0	24.0	70	935