

Serie ORION LED

Emergency lighting



ORION EFS-193



ORION PC-190

Installation

Wall or ceiling surface mounting.


Design

Poly carbonate housing and diffuser, manufactured in conformity with Norms EN60598-2-22 & UNE 20-392-93. LAMP included.

Optical part

Polycarbonate transparent diffuser. Pictograms (see page 41)

ACCESSORIES

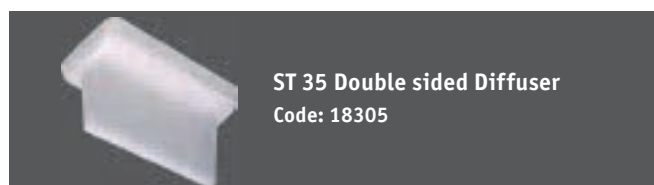

Model	Type	IP	Weight	Autonomy	Lumens	Battery	Lamp	Code
ORION EFS-100	NM	65	1	1	100	2,4 V 1.5A*h	8 W (G5)	1630100000
ORION EFS-103	NM	65	1,1	3	90	2,4 V 1.5A*h	8 W (G5)	-
ORION EFS-190	NM	65	1	1	156	3.6 V 1.5A*h	8 W (G5)	4501001020
ORION EFS-300	NM	65	1,1	1	238	6.0 V 1.5A*h	8 W (G5)	4501006250
ORION EFS-302	NM	65	1,2	2	250	6.0 V 1.6A*h x2	8 W (G5)	-
ORION EFS-193	NM	65	1,2	3	156	(3.6 V 1.6A*h)x2	8 W (G5)	4501001030
ORION EFS-400	NM	65	1	1	362	6.0 V 1.5A*h	PL-11 W (2G7)	4501001060
ORION EFS-500	NM	65	1,1	1	500	(3.6 V 1.6A*h)x2	PL-11 W (2G7)	1610100000
ORION OM-200	M	65	1	1	150	3.6 V 1.5A*h	8 W (G5)	4501007100
ORION OM-203	M	65	1,2	3	160	(3.6 V 1.6A*h)x2	8 W (G5)	4501007110
ORION OM-210	M	65	1	1	160	3.6 V 1.5A*h	PL-11W (2G7)	4501007190
ORION PC-100	C	65	1,1	1	95	2,4 V 1.5A*h	8 W (G5)	-
ORION PC-103	C	65	1,2	3	75	2,4 V 1.5A*h	8 W (G5)	-
ORION PC-190	C	65	1,1	1	190	3.6 V 1.5A*h	8 W (G5)	4501002020
ORION PC-250	C	65	1,2	1	246	6.0 V 1.5A*h	8 W (G5)	1700100000
ORION PC-193	C	65	1,3	3	110	(3.6 V 1.6A*h)x2	8 W (G5)	4501002030

ORION SIGN	AC/DC	65	0,8	-	400	-	8 W (G5)	4501007220
------------	-------	----	-----	---	-----	---	----------	------------

ORION EFS-100 AT	NM	65	1	1	100	6 V 1.8A*h	8 W (G5)	4501007470
ORION EFS-190 AT	NM	65	1	1	150	6 V 1.8A*h	8 W (G5)	4501007630
ORION EFS-300 AT	NM	65	1,1	1	238	6 V 1.8A*h	8 W (G5)	-
ORION EFS-400 AT	NM	65	1,1	1	320	6 V 1.8A*h	PL-11W (2G7)	4501007610
ORION EFS-500 AT	NM	65	1,1	1	500	6 V 1.8A*h	8 W (G5)	4501007620
ORION PC-100 AT	C	65	1,1	1	90	6 V 1.8A*h	8 W (G5)	4501007480
ORION PC-190 AT	C	65	1,1	1	136	6 V 1.8A*h	8 W (G5)	4501007640
ORION PC-250 AT	C	65	1,1	1	230	6 V 1.8A*h	8 W (G5)	4501007650
ORION PC-300 AT	C	65	1,1	1	300	6 V 1.8A*h	8 W (G5)	4501007660

*NM: NON MAINTAINED / M: MAINTAINED / *C: COMBINED 2 TUBES / *AT: AUTO TEST